

202-point wide-range level meter

WRM-2026C

Wide-range level meter with 202-point LED indicator

アナログ AES




Specification

AES	Input Ports	3 ports (AES-3id)
	Input Impedance	TERM ON 75 Ω (TERM OFF: 10K Ω or more)
	Input Connectors	3 BNCs
Analog	Output Ports	3 ports (AES-3id) (Input loopthrough)
	Output Connectors	3 BNCs
	Input Ports	Parallel 6 ports
Power	Input Impedance	TERM ON 600 Ω
	Input Connectors	1 D-sub25P female (metric screw thread)
	Output Ports	Parallel 6 ports (Input loopthrough)
Temperature and Humidity	Output Connectors	1 D-sub25P female (metric screw thread)
	Rated Supply Voltage	AC100V/200V (50/60Hz)
	Power Consumption	40VA or less
Weight	Operating Temperature	5-40°C
	Operating Humidity	25-80%RH
	Storage Temperature	0-60°C
Overall Size (mm)	Storage Humidity	25-80%RH
	Weight	4 kg or less
Overall Size (mm) 430 (W) x 88 (D) x 200 (H) * Protrusion not included.		

EIA2U rack-mount size

Back Panel

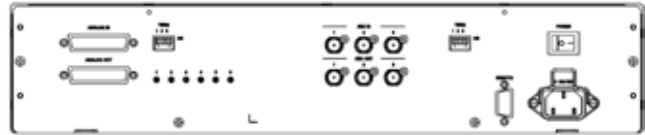

1U half-size digital bar meter

PVM-D1012HB

Swing-type VU/Peak meter with 101-point LED bar indicator.
Small portable size of 1U half-size.

AES




Specification

Input and Output	Input Ports	AES-3id
	Input Impedance	TERM ON 75 Ω (TERM OFF: 10K Ω or more)
	Input Connectors	1 BNC
Power	Output Ports	AES-3id (Input loopthrough)
	Output Connectors	1 BNC
	Rated Supply Voltage	AC100V/200V (50/60Hz) DC+12V
Temperature and Humidity	Power Consumption	18VA or less 10W or less
	Operating Temperature	5-40°C
	Operating Humidity	25-80%RH
Weight	Storage Temperature	0-60°C
	Storage Humidity	25-80%RH
	Weight	1.5 kg or less
Overall Size (mm) 215 (W) x 200 (D) x 44 (H) * Protrusion not included.		

EIA1U half-size

Back Panel

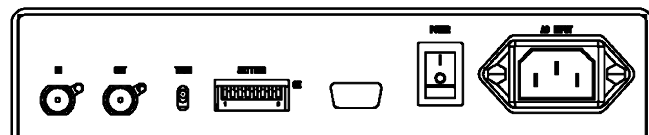

* DC Input type also available.

Dual-display (VU/Peak) level meter with easy-to-see LED bar indicator

101-point level meter

PVM-M1018HV

Swing-type VU/Peak meter with 101-point LED bar indicator.
Easy-to-read sound level from a short distance away through the large display area (3U size).



AES HD/SD-SDI


*Please note that the image show the previous release as the latest version is being developed. The new version is shown below.

仕様一覧

SDI	Input Ports	2 ports
	Input Impedance	75 Ω
	Input Connectors	2 BNCs
	Output Ports	1 port
	Output Impedance	75 Ω
	Output Connectors	1 BNC
Digital Output	Ports	4 ports (AES-3id)
	Impedance	75 Ω (AES-3id)
	Connectors	1 D-sub9P female (metric screw thread)
AES	Input Ports	4 ports (AES-3id)
	Input Impedance	TERM ON 75 Ω (TERM OFF: 10K Ω or more)
	Input Connectors	4 BNCs
	Output Ports	4 ports (AES-3id)
Remote	Output Connectors	4 BNCs
	Ports	1 no-voltage contact input
	Connectors	1 D-sub9P male (inch screw thread)
Power	Rated Supply Voltage	AC100V/200Vv (50/60Hz)
	Power Consumption	35VA or less
	Operating Temperature	5-40°C
Temperature and Humidity	Operating Humidity	25-80%RH
	Storage Temperature	0-60°C
	Storage Humidity	25-90%RH
Weight	3.5 kg or less	
Overall Size (mm)	130 (W) x 214.6 (D) x 244.5 (H) * Protrusion not included.	

EIA3U half size

Back Panel

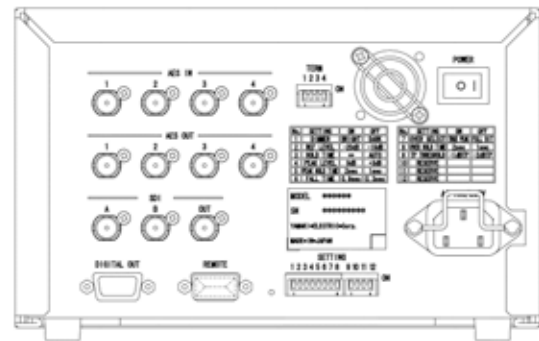

1U surround sound supported audio monitor

YAM-S108V

Lightweight (3.5kg) and HD/SD-SDI multi-format supported Audio Monitor with 32-point LED bar indicator

HD/SD-SDI



Specification

SDI Input	Ports	2 ports (select 1 port)
	Impedance	75 Ω
	Connectors	2 BNCs
SDI Output	Ports	1 Port (Buffer output from the selected signal.)
	Impedance	75 Ω
	Connectors	1 BNC
AES Output	Ports	4 ports
	Impedance	75 Ω
	Connectors	4 BNCs
Power	Rated Supply Voltage	AC100V/200Vv (50/60Hz)
	Power Consumption	50VA or less
Weight	3.5 kg or less	
Overall Size (mm)	215 (W) x 230 (D) x 88 (H) (protrusion such as connectors and switch not included)	

EIA1U rack-mount size

Back Panel

